

EMST LINKING CONVEYOR



Standard features

- PLC Program control.
- Start / Stop switch.
- Anti-static conveyor belt.
- Easy way of belt replacement.
- Heavy bottom design to prevent shifting.
- PCB precise stopping in position.
- Smooth and parallel width adjustment.(lead screw)
- SMEMA compatible.

Technical specifications


• Transport height:	900mm ±20mm
• Transfer direction:	Left to right
• Operation side:	Front of the machine
• Fixed rail:	Front of the machine
• Interface:	SMEMA
• Conveyer concept:	ESD flat belt
• Belt speed	0.3 - 2 m/min adjustable
• PCB edge support:	3mm
• Components clearance	Bottom 30 mm or specify
• Power supply	230 VAC/50 Hz/1 Ph
• Power consumption:	100VA max. or specify
• Load bearing:	1.5kg/PCB

Options

- Non standard conveyor / segment lengths.
- Electrical width adjustment.
- Other options available on request.

Dimensions

• L x W x H	1000 x 630 x 900
• Weight	50 Kg Approx.
• PCB Length	50mm - 350mm
• PCB Width	50mm - 300mm
• PCB Thickness	0.6mm - 4.5mm

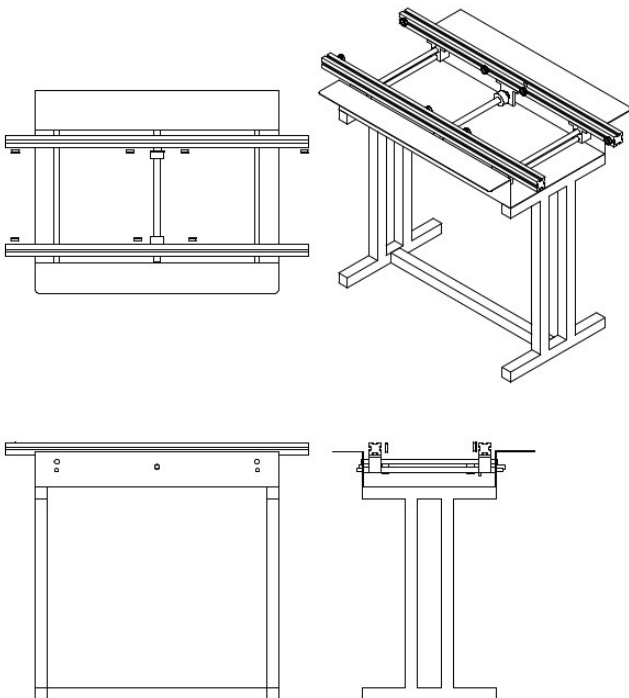

Represented by:

Manufactured by:

EMS TECHNOLOGIES PVT. LTD.

S. No. 43/3, Gat No.322, Plot No.1,
At Post- Pirangut Tal- Mulshi,
Dist. PUNE 412115- India

Sold & Serviced by:

emst
Marketing Pvt. Ltd.

S. No. 43/3, Gat No.322, Plot No.1,
At Post- Pirangut Tal- Mulshi,
Dist. PUNE 412115- India
P: +91 98955 25010
E: contact@emstonline.com
W: www.emstonline.com